

## **SERIES TTE | EXPLOSION-PROOF RTD TEMPERATURE TRANSMITTER**



#### **BENEFITS/FEATURES**

- FM approved for Class I, Groups B, C, D; Class II, Groups E, F, G classified explosive environments
- Optional LCD
- Output span selected from seven common ranges or user determined

## **APPLICATIONS**


- Explosive process environments
- Offshore HVAC monitoring

## **DESCRIPTION**

The **Series TTE Explosion-Proof RTD Temperature Transmitter** is the ideal product for hazardous temperature measurement applications. The TTE series has seven pre-programmed temperature ranges that are selectable via an internal dip switch. For those applications that need a custom range, the transmitter can be easily configured for any range between -30 to 250°F with a minimum span of 40°F. The span and zero can be quickly adjusted with a simple push button design. The compact housing allows for the transmitter to be mounted in virtually any application.


#### **SPECIFICATIONS**

Pt1000, 0.00385 DIN.	
User selectable – any range between -30 to 250°F with a minimum span of 40°F.	
Ambient: 0 to 158°F (-18 to 70°C); Process: -30 to 250°F (-34.4 to 121.1°C).	
Transmitter ±0.1% FS; Probe ±0.3% FS.	
±0.02%/°C max.	
250 ms.	
316 SS.	
1/2" male NPT.	
1/2" female NPT.	
2" to 18" (depending on model).	
2000 psi (137.9 bar).	
10-35 VDC.	
4-20 mA (2-wire loop powered).	
2 lines X 8 character LCD.	
Weatherproof NEMA 4X (IP66) and Explosion-proof. Listed with FM for Class I, Division 1, Groups B, C and D, and dust-ignitionproof for Class II, Division 1, Groups E, F and G and Class III atmospheres.	
2 lb 8 oz (1134 g).	
CE, FM.	

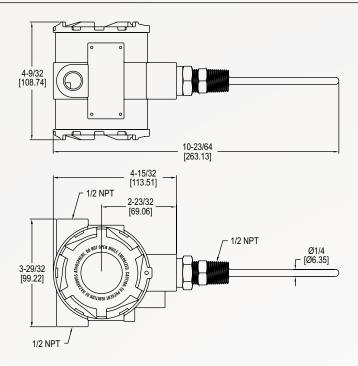

## **HOW TO ORDER**

Use the **bold** characters from the chart below to construct a product code.

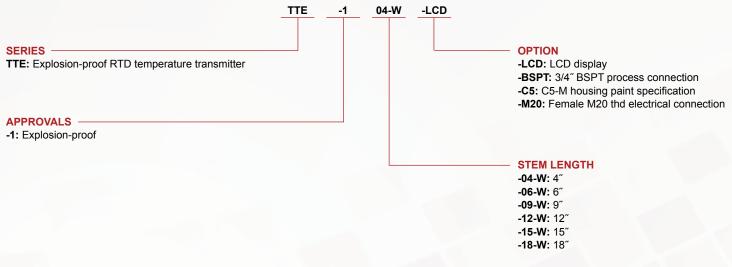

## **ACCESSORIES**

Model	Description
A-287	Mounting bracket for pipe or surface mounting

# **ORDER ONLINE TODAY!**

dwyer-inst.com/Product/SeriesTTE



DWYER INSTRUMENTS, INC.

©Copyright 2021 Dwyer Instruments, Inc. Printed in U.S.A. 3/21

DS-TTE Rev. 1